




Replacing IBM ThinkPad 560z Keyboard Keypad

Written By: Derek Driscoll

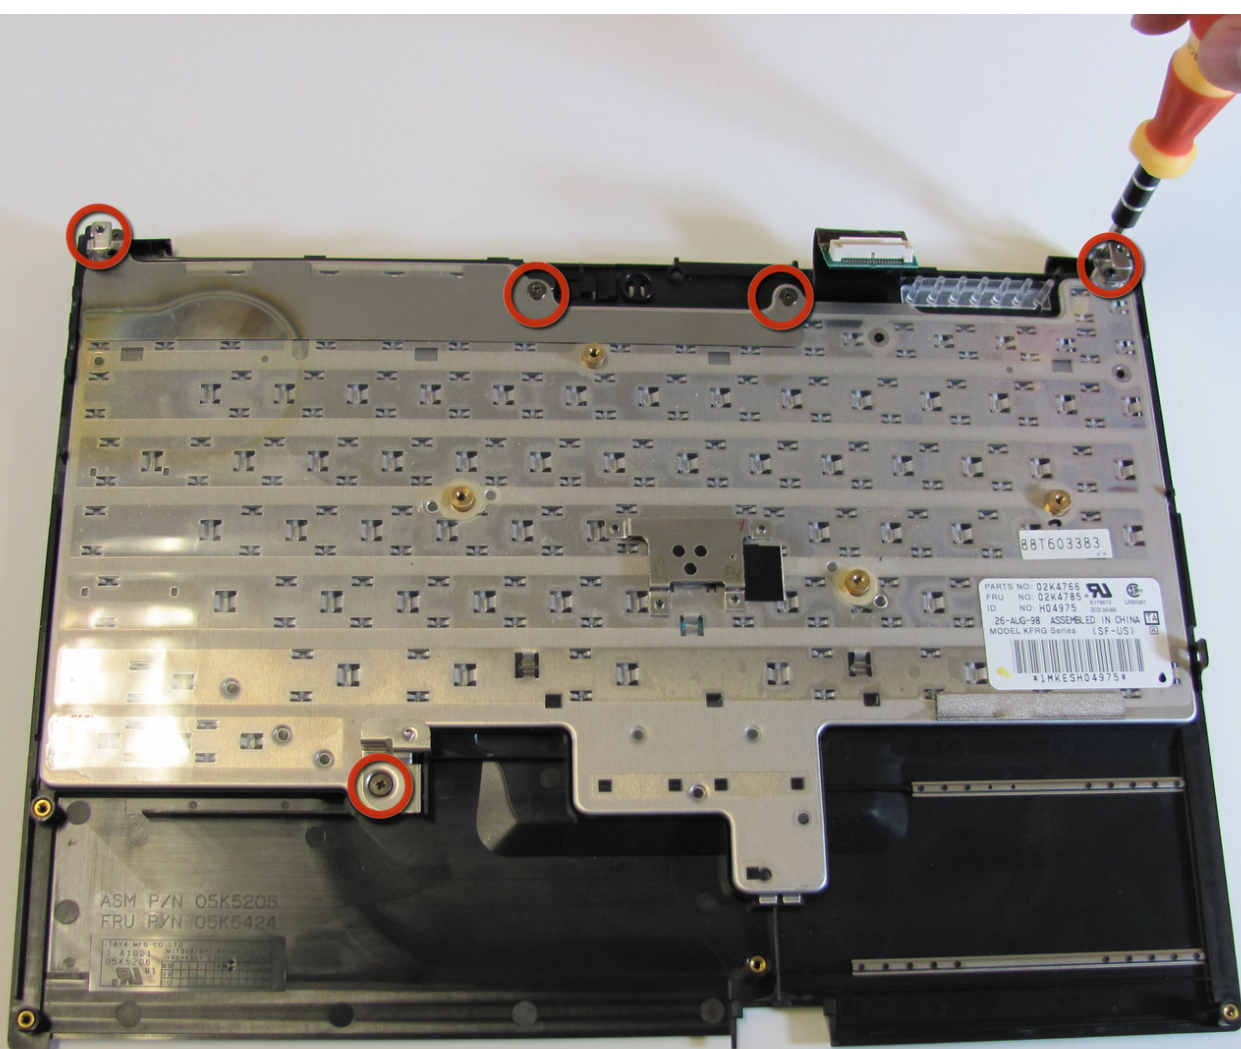

INTRODUCTION

How to remove the keyboard key pad for repair or replacement.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Upper Case



- Remove the 7 mm Philip screws.
- Remove the 10 mm Philip screws.
- Remove the 14 mm Philip screw.

Step 2



- Open the flap on the left hand side.

Step 3



- Insert the iPod opening tools between the right and left sides of the latch.
- Pry at first the right then left side of the latch to detach the laptop's cover.

Step 4




- Open the flap on the right side.

Step 5



- Insert the iPod opening tools within this latch towards the right side.
- Gently pry out this side to release the top cover.


Step 6

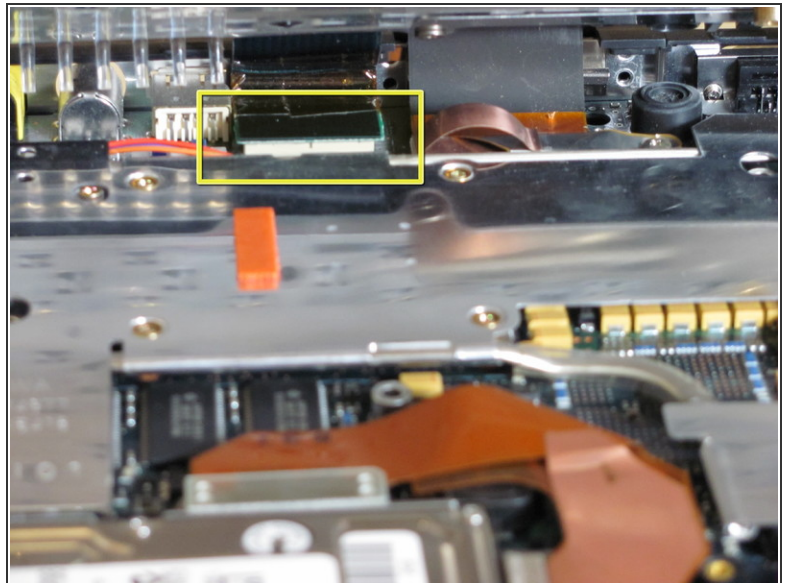

- Lift the keyboard slowly.

⚠ The keyboard is attached to the computer via a cable which can be damaged if not careful.

Step 7

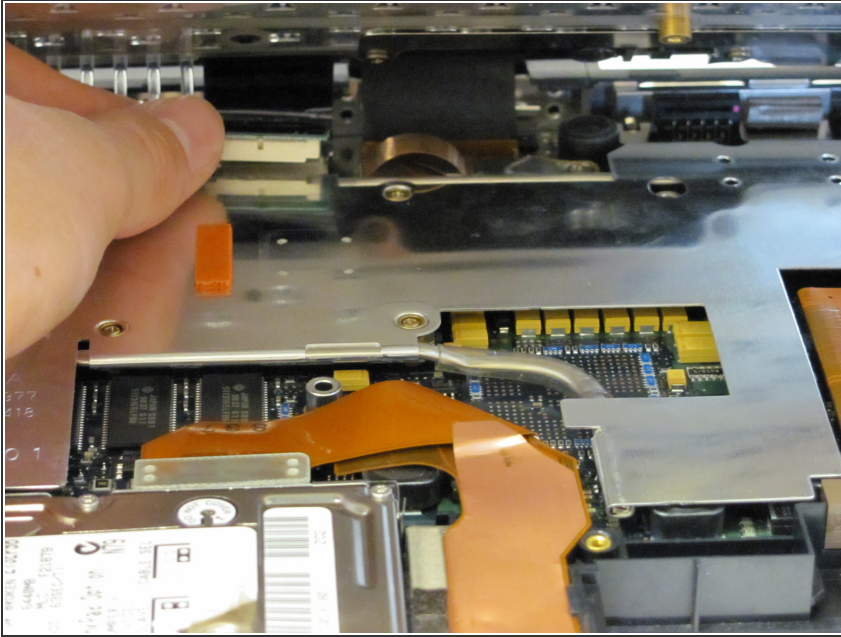



- Use your fingers or a spudger to detach the connector.

Step 8



- Carefully lift and remove the keyboard.

Step 9 — Keyboard Keypad

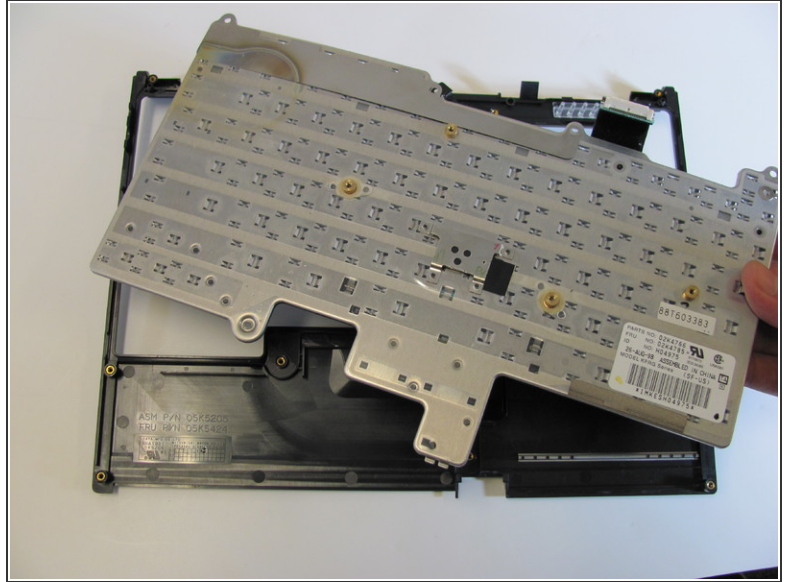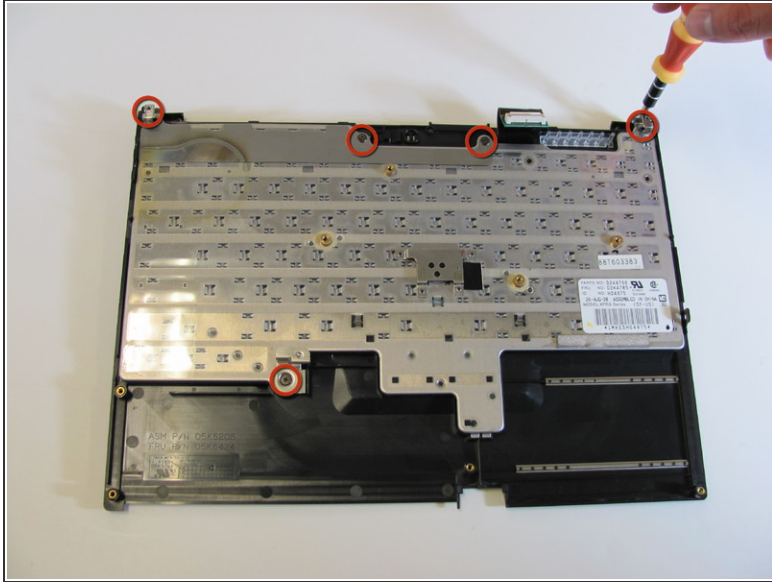

- Remove the five Phillips screws from the underside of the keyboard.
- Remove the keypad.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-26 02:12:07 AM.